

Energy Management Modular Power Quality Analyzer Type WM23-96

CARLO GAVAZZI



- Phases asymmetry control
- Optional RS 232 serial port
- Optional RS 422/485 serial port

- Accuracy ± 0.5 F.S. (current/voltage)
- Three-phase modular power analyzer
- Backlighted LCD 4x3 1/2 DGT Display
- Front size: 96x96 mm
- Measurements of phase and system variables: W, W_{dmd}, var, VA, VA_{dmd}, PF, V_{L-N}, V_{L-L}, A, An, Hz, THD-A, THD-V
- TRMS measurement of distorted waves (voltages/currents)
- Measurement of MAX values: W L1, W L2, W L3, W Σ , W_{dmd} (AL1-AL2-AL3 max on request)
- Measurement of MIN values: PF L1, PF L2, PF L3, PF Σ
- Harmonic analysis (FFT) up to the 16th harmonic (current and voltage)
- Instantaneous variables read-out: 4x3 1/2 digit
- Up to 2 optional relay or open collector outputs
- 1 optional analogue output
- MODBUS, JBUS Protocol
- Protection degree (front): IP 65
- Universal power supply: 18-60VAC/VDC, 90-260 VAC/VDC

Product Description

μ P-based three-phase modular power quality analyzer with built-in programming key-pad. Particularly recommended for

a detailed analysis of the electrical variables and of the power quality. Housing for panel mounting and IP65 (front) protection degree.

Ordering Key

WM23-96AV53H XX XX XX XX X

Model	
Range Code	
System	
Power Supply	
Slot A	
Slot B	
Slot C	
Slot D	
Options	

Type selection

Range code	Slot A (signal retransmission)	Slot B (communication)	Slot C (redundant output or digital inputs)
AV4: 208VLL/5(6)AAC -20% $\leq$ Un $\leq$ +20% AV5: 400VLL/5(6)AAC -20% $\leq$ Un $\leq$ +15% AV6: 100VLL/5(6)AAC -20% $\leq$ Un $\leq$ +15% AV7: 660VLL/5(6)AAC -30% $\leq$ Un $\leq$ +15% 50-60 Hz for all input modules. Module not removable.	XX: None A1: Single analogue output, 20mADC A2: Single analogue output, ± 5 mADC A3: Single analogue output, ± 10 mADC A4: Single analogue output, ± 20 mADC B1: Dual analogue output, 20mADC B2: Dual analogue output, ± 5 mADC B3: Dual analogue output, ± 10 mADC B4: Dual analogue output, ± 20 mADC V1: Single analogue output, 10VDC V2: Single analogue output, ± 1 VDC V3: Single analogue output, ± 5 VDC V4: Single analogue output, ± 10 VDC W1: Dual analogue output, 10VDC W2: Dual analogue output, ± 1 VDC W3: Dual analogue output, ± 5 VDC W4: Dual analogue output, ± 10 VDC	XX: None S1: Serial port, RS485 multidrop, bidirectional NOTE: max. digital output (alarms and/or pulses): 2, any exceeding output is redundant. NOTE: the second analogue output is intended as redundant type only. NOTE: with the A, B, C, D types power supply, only an open collector module or a single relay output module can be used. The instrument can be fully equipped only with L and H type power supply.	XX: None R1: Single relay output (AC1-8AAC, 250VAC) R2: Dual relay output (AC1-8AAC, 250VAC) O1: Single open collector output (30V/100mADC) O2: Dual open collector output (30V/100mADC) D1: 3 digital inputs D2: 3 digital inputs + aux output Slot D (alarm output) XX: None R1: Single relay output, (AC1-8AAC, 250VAC) R2: Dual relay output, (AC1-8AAC, 250VAC) O1: Single open collector output (30V/100mADC) O2: Dual open collector output (30V/100mADC)
System	Power supply	Options	
3: Three-phase, unbalanced load, with or without neutral	A: 24 VAC -15 +10% 50-60Hz B: 48 VAC -15 +10% 50-60Hz C: 115VAC -15 +10% 50-60Hz D: 230 VAC -15 +10% 50-60Hz L: 18 to 60VAC/VDC H: 90 to 260VAC/VDC	X: None S: RS232 serial port displaying and recording of AL1-AL2-AL3 max instead of WL1-WL2-WL3 max. A: Y: Options: S+A above.	

Input Specifications

Number of analogue inputs			
Current	3	Active power (@ 25°C ± 5°C, R.H. ≤ 60%)	±(1% Pn +2DGT)
Voltage	4	Reactive Power (@ 25°C ± 5°C, R.H. ≤ 60%)	±(2% Pn +2DGT)
Digital Inputs		Apparent power (@ 25°C ± 5°C, R.H. ≤ 60%)	±(1% Pn +2DGT)
AQ1038	Number of inputs: 3 (voltage free)	Harmonic distortion (@ 25°C ± 5°C, R.H. ≤ 60%)	±3% F.S. (up to 16 th harmonic) (F.S.: 100%)
Use	Synchronization of the W-VAdmd measurements Input 1: lock of programming Inputs 2 and 3: W-VA dmd measurements synchronization	Additional errors	
Reading voltage AQ1042	24VDC/1mA	Humidity	≤0.3% F.S. from 60% to 90% H.R.
Input frequency	Number of inputs: 3 + inputs power supply	Temperature drift	≤ 200ppm/°C
Output voltage	Max 20Hz, dutycycle 50%	Display	Back-lighted LCD 4x3 1/2 digit 70 x 38mm
Output current	16V<+Aux<24VDC	Display refresh time	700ms
Open contact resistance	Max 15mA	Measurements	Current, voltage, power, power factor, frequency, harmonic distortion. TRMS measurement of a distorted wave.
Insulation	Min 100kΩ 4000VRMS	Coupling type	Direct
Accuracy (display, RS232, RS485)	In=5A; Pn= In* Un Un: F.S. range AV4-5-6-7	Input impedance	
Current	±(0.5% In +2DGT)	208VLL 5(6)AAC (AV4):	>200 kΩ
Phase-neutral voltage	±(0.5% Un +2DGT)	400VLL 5(6)AAC (AV5):	>900 kΩ
Phase-phase voltage	±(1% Un +2DGT)	100VLL 5(6)AAC (AV6):	>200 kΩ
Frequency	±0.1Hz	660VLL 5(6)AAC (AV7):	>900 kΩ

Output Specifications

Analogue Outputs	(on request)	measuring input
Number of outputs	Up to 1 (+1 redundant)	4000 V _{RMS} output to supply input
Accuracy	±0.2% f.s. (@ 25°C ± 5°C, R.H. ≤ 60%)	
Range	0 to 20 mADC, 0 to ±20 mADC 0 to ±10 mADC, 0 to ±5 mADC 0 to 10 VDC, 0 to ±10 VDC 0 to ±5 VDC 0 to ±1 VDC	RS422/RS485
Scaling factor:	Programmable within the whole range of retransmission; it allows the retransmission management of all values from: 0 and 20 mADC, ≤ 900 ms typical (filter excluded, FFT excluded)	(on request) Multidrop bidirectional (static and dynamic variables) 2 or 4 wires, max. distance 1200m, termination directly on the instrument
Response time	≤ 900 ms typical (filter excluded, FFT excluded)	Addresses Protocol Data (bidirectional) Dynamic (reading only)
Ripple	≤ 1% acc. to IEC 60688-1, EN 60688-1	Static (writing only)
Total temperature drift	≤ 500 ppm/°C	Data format
Load:	≤ 600 Ω	Baud-rate
±20 mADC	≤ 550 Ω	Insulation
±10 mADC	≤ 1100 Ω	
± 5 mADC	≤ 2200 Ω	RS232
10 VDC	≥ 10 kΩ	(on request) bidirectional (static and dynamic variables)
±10 VDC	≥ 10 kΩ	Connections
± 5 VDC	≥ 10 kΩ	Data format
± 1 VDC	≥ 10 kΩ	Baud-rate
Insulation	By means of optocouplers, 4000 V _{RMS} output to	

Output Specifications (cont.)

Protocol other data	MODBUS/JBUS (RTU) as per RS422/485	Output type	Relay, SPDT type AC 1-8A @ 250VAC DC 12-5A @ 24VDC AC 15-2.5A @ 250VAC DC 13-2.5A @ 24VDC
Digital outputs	(on request) To be used as alarms or remote control.		≤ 150 ms, filter excluded, FFT excluded, setpoint on-time delay: "0 s"
Alarm outputs	(on request)	Min. response time	
Number of outputs	up to 2, independent		
Alarm type	Up alarm, down alarm	Insulation	By means of optocouplers, 4000 V _{RMS} output to measuring input, 4000 V _{RMS} output to supply input.
Variables to be controlled	see the "List of the variables that can be connected..."		
Set-point adjustment	from 0 to 100% of the electrical scale		
Hysteresis	from 0 to 100% of the electrical scale	Note	The outputs can be either relay type or open collector type (V _{ON} 1.2VDC/Max. 100mA, V _{OFF} 30VDC Max.). Insulation like relay outputs.
On-time delay	0 to 255s		
Relay status	Selectable, normally de-energized and normally energized		

Software Functions

Password	Numeric code of max 4 digits; 2 protection levels of the programming data	Page 5: PF L1(min), PF L2 (min), PF L3 (min)
1st level	Password "0", no protection	Page 6: W L1, W L2, W L3
2nd level	Password from 1 to 1000, all data are protected.	Page 7: W L1 (max), W L2 (max), W L3 (max)
Transformer ratio	CT from 1 to 5000 VT from 1.0 to 1999, where CT x VT ≤ 10000	Page 7: "A" option: AL1 (max) AL2 (max) AL3 (max)
Power demand (dmd)		Page 8: var L1, var L2, var L3
Integration time	Programmable from 1 to 30 min	Page 9: VA L1, VA L2, VA L3
Filter		Page 10: AL1 (alarm 1)
Filter operating range	From 0 to 99.9% of the input electrical scale	Page 11: AL2 (alarm 2)
Filtering coefficient	1 to 16	Page 12: WΣ, PFΣ, varΣ, Hz
Filter action	Measurements, alarms, serial port (fundamental variables: V, A, W and their derived ones).	Page 13: WΣ, PFΣ, VAΣ, Hz
Page Variables		Page 14: WΣ (max), PFΣ (min)
Three-phase system with neutral	Up to 4 by page Page 1: V L1, V L2, V L3, V LNΣ Page 2: V L12, V L13, V L31, VΣ Page 3: A L1, A L2, AL3, An Page 4: PF L1, PF L2, PF L3, PFΣ	Page 15: W dmd, VA dmd, r.t. Page 16: W dmd (max), VA dmd (max) Page 17: THD VL1, THD VL2, THD VL3 Page 17: THD AL1, THD AL2, THD AL3

Supply Specifications

AC voltage	90 to 260 VDC/VAC 18 to 60VDC/VAC 24 VAC -15+10% 50-60Hz 48 VAC -15+10% 50-60Hz	115VAC -15+10% 50-60Hz 230 VAC -15+10% 50-60Hz
	Power consumption	≤ 30VA/12W (90 to 260V) ≤ 20VA/12W (18 to 60V)

General Specifications

Operating temperature	0 to +50°C (32 to 122°F) (R.H. < 90% non condensing)	Immunity	light industry environment EN 61000-6-2 (class A) industrial environment
Storage temperature	-10 to +60°C (14 to 140°F) (R.H. < 90% non condensing)	Other standards	
Installation category	Cat. III (IEC 60664)	Safety	IEC 61010-1, EN 61010-1
Pollution degree	2	Product	IEC 60688-1, EN 60688-1
Key-pad lock	by means of a rotary switch placed behind the display or by means of a contact (in case of presence of the digital inputs module)	Approvals	CE
Insulation	4000 V _{RMS} between all inputs/outputs to ground	Connections 5(6)A	Screw-type, max 2.5 mm ² wires (2 x 1.5mm ²)
Dielectric strength	4000 V _{RMS} for 1 minute	Housing	
EMC		Dimensions	96x96x140 mm
Emissions	EN50082-1 (class A) residential, commercial and	Material	ABS, NORYL, PC (front) self-extinguishing: UL 94 V-0
		Protection degree	Front: IP65 Connections: IP20
		Weight	Approx. 400 g (packing incl.)

Function Description

Input/analogue output scaling capability

Working of the analogue output (Y) versus the input variable (X) - (input/output scaling capability)

Figure A

The sign of measured quantity and output quantity remains the same. The output quantity is proportional to the measured quantity.




Figure D

The sign of measured quantity and output quantity remains the same. With the measured quantity being zero, the output quantity already has the value $Y1 = 0.2$ (live zero output).




Figure B

The sign of measured quantity and output quantity changes simultaneously. The output quantity is proportional to the measured quantity.




Figure E

The sign of the measured quantity changes but that of the output quantity remains the same. The output quantity steadily increases from the value X1 to the value X2 of the measured quantity.




Figure C

The sign of measured quantity and output quantity remains the same. From X0 to X1, the output variable is 0. The range X1...X2 is delineated on the entire output range.





Figure F

The sign of the measured quantity remains the same, that of the output quantity changes as the measured quantity leaves range X0...X1 and passes to range X1...X2.



Mode of operation

Waveform of the signals that can be measured

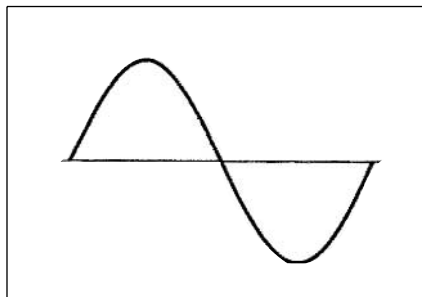


Figure G

Sinewave, undistorted

Fundamental content 100%
 Harmonic content 0%
 $A_{rms} = 1.1107 | \bar{A} |$

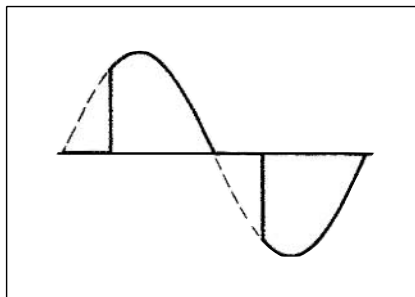


Figure H

Sinewave, indented

Fundamental content 10...100%
 Harmonic content 0...90%
 Frequency spectrum: 3rd to 16th harmonic

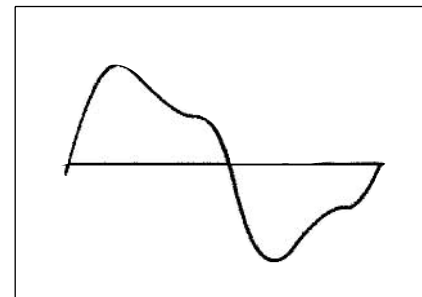


Figure I

Sinewave, distorted

Fundamental content 70...90%
 Harmonic content 10...30%
 Frequency spectrum: 3rd to 16th harmonic

Harmonic Analysis

Analysis principle	FFT	Display pages	THD %
Harmonic measurement		Others	
Current	Up to 16th harmonic		The harmonic distortion can be measured in both 3-wire or 4-wire systems.
Voltage	Up to 16th harmonic		
Type of harmonics	THD (V _{L1}) THD (V _{L2}) THD (V _{L3}) THD (A _{L1}) THD (A _{L2}) THD (A _{L3})		

Display pages

Variables that can be displayed in case of a three-phase system, 4-wire connection.

No	1st variable	2nd variable	3rd variable	4th variable	Notes
1	V L1	V L2	V L3	V LN Σ	Σ = system
2	V L1-2	V L2-3	V L3-1	V Σ	Σ = system
3	A L1	A L2	A L3	A _n	A _n = neutral current
4	PF L1	PF L2	PF L3	PF Σ	Σ = system
5	PF L1 (min)	PF L2 (min)	PF L3 (min)		
6	W L1	W L2	W L3		
7	W L1 (max)	W L2 (max)	W L3 (max)		With "A" option: AL1-AL2-AL3 max
8	var L1	var L2	var L3		
9	VA L1	VA L2	VA L3		
10	AL 1				variable connected to alarm 1
11	AL 2				variable connected to alarm 2
12	W Σ	PF Σ	var Σ	Hz	Σ = system
13	W Σ	PF Σ	VA Σ	Hz	Σ = system
14	W Σ (max)	PF Σ (min)			Σ = system
15	W dmd	VA dmd	r.t.		r.t.= symbol of communication Rx/Tx on the serial port
16	W dmd (max)	VA dmd (max)			
17	THD V L1	THD V L2	THD V L3		total harmonic distortion
18	THD A L1	THD A L2	THD A L3		total harmonic distortion

Used Calculation Formula

Phase Variables

Instantaneous effective voltage	Instantaneous effective current
$V_{IN} = \sqrt{\frac{1}{n} \cdot \sum_1^n (V_{IN})^2}$	$A_1 = \sqrt{\frac{1}{n} \cdot \sum_1^n (A_1)^2}$
Instantaneous active power	Instantaneous apparent power
$W_1 = \frac{1}{n} \cdot \sum_1^n (V_{IN})_i \cdot (A_1)_i$	$VA_1 = V_{IN} \cdot A_1$
Instantaneous power factor	Instantaneous reactive power
$\cos\phi_1 = \frac{W_1}{VA_1}$	$VAR_1 = \sqrt{(VA_1)^2 - (W_1)^2}$

System variables

Three-phase active power	Equivalent three-phase voltage
$W_\Sigma = W_1 + W_2 + W_3$	$V_\Sigma = \frac{V_{12} + V_{23} + V_{31}}{3}$
Three-phase apparent power	Three-phase reactive power
$VA_\Sigma = \sqrt{W_\Sigma^2 + VAR_\Sigma^2}$	$VAR_\Sigma = (VAR_1 + VAR_2 + VAR_3)$
Three-phase power factor	Neutral current
$\cos\phi_\Sigma = \frac{W_\Sigma}{VA_\Sigma}$ (TPF)	$An = \frac{A_{L1} + A_{L2} + A_{L3}}{3}$
Total harmonic distortion	Where:
$THD_i = \frac{\sqrt{\sum_{n=2}^{\infty} T_{i,n}^2}}{T_{i,1}}$	i = considered phase (L1, L2 or L3)
	T = considered variable (V or A)
	n = harmonic order

List of the variables that can be connected to:

- Alarm outputs
- Analogue outputs

N°	Variable	3-phase + neutral	3-phase no neutral	Note
1	$V_{L-N\Sigma}$	x	x	Σ = system
2	$V_{L-L\Sigma}$	x	x	Σ = system
3	$W\Sigma$	x	x	Σ = system
4	$var\Sigma$	x	x	Σ = system
5	$VA\Sigma$	x	x	Σ = system
6	$PF\Sigma$	x	x	Σ = system
7	THD V (1)	x	x	if FFT is activated
8	THD A (1)	x	x	if FFT is activated
9	A n	x	x	
10	VA dmd	x	x	
11	W dmd	x	x	
12	ASY	x	x	asymmetry

- (1) The highest value among the three phases
 (2) The RS232 communication port works as alternative of the RS485 module.

The possible module combinations




Basic unit	Slot A	Slot B	Slot C	Slot D
Single analogue output	●			
Dual analogue output	●			
RS485 port		●		
Single relay output			●	
Single open collector output			●	
Dual relay output			●	●
Dual open collector output			●	●
3 digital inputs			●	
3 digital inputs + AUX			●	
Basic unit	Slot E			
RS232 port		●		

The available modules







Type	N. of channels	Ordering Code
WM23-96 400V L-L 5A (base)		AH2300
WM23-96 208V L-L 5A (base)		AH2301
WM23-96 100V L-L 5A (base)		AH2302
WM23-96 660V L-L 5A (base)		AH2303
WM23-96 400V L-L 5A (base)	"A" opt.	AH2300A
WM23-96 208V L-L 5A (base)	"A" opt.	AH2301A
WM23-96 100V L-L 5A (base)	"A" opt.	AH2302A
WM23-96 660V L-L 5A (base)	"A" opt.	AH2303A
24VAC power supply		AP1025
48VAC power supply		AP1024
115VAC power supply		AP1023
230VAC power supply		AP1022
18-60VAC/DC power supply		AP1021
90-260VAC/DC power supply		AP1020
20mADC analogue output	1	AO1050
10VDC analogue output	1	AO1051
±5mADC analogue output	1	AO1052
±10mADC analogue output	1	AO1053
±20mADC analogue output	1	AO1054
±1VDC analogue output	1	AO1055
±5VDC analogue output	1	AO1056
±10VDC analogue output	1	AO1057
20mADC analogue output	2	AO1026
10VDC analogue output	2	AO1027
±5mADC analogue output	2	AO1028
±10mADC analogue output	2	AO1029
±20mADC analogue output	2	AO1030
±1VDC analogue output	2	AO1031
±5VDC analogue output	2	AO1032
±10VDC analogue output	2	AO1033
Relay output	1	AO1058
Relay output	2	AO1035
Open collector output	1	AO1059
Open collector output	2	AO1036
Digital inputs	3	AQ1038
Digital inputs + AUX	3	AQ1042
RS485 serial port (2)	1	AR1034
RS232 serial port (2)	1	AR1039

Wiring Diagrams


Single phase

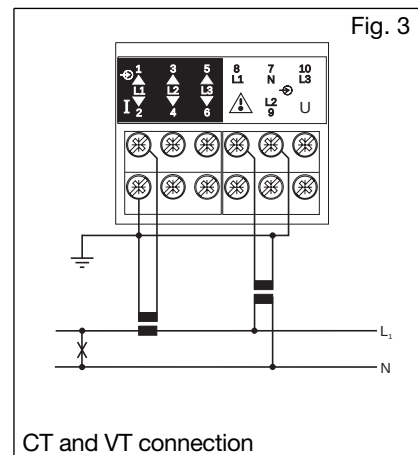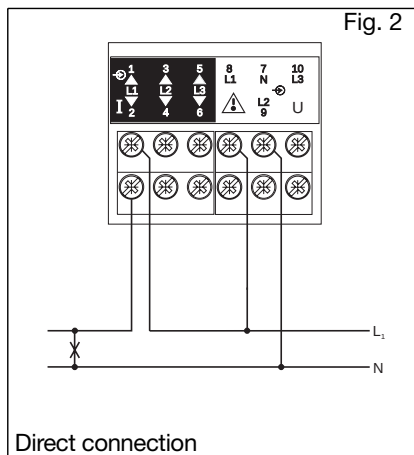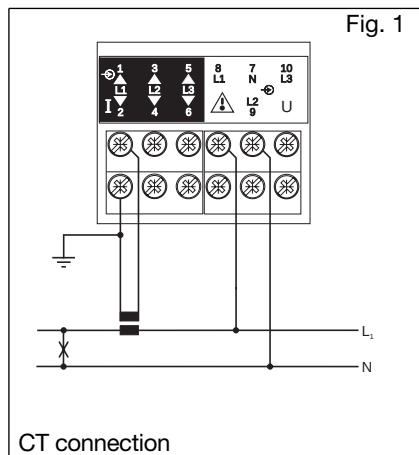


Three-phase - Unbalanced load

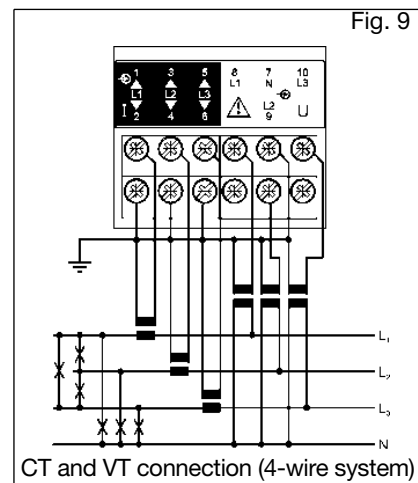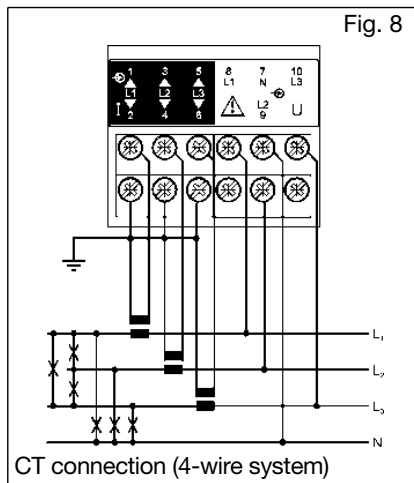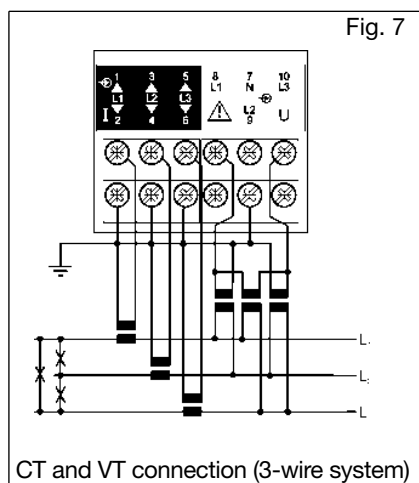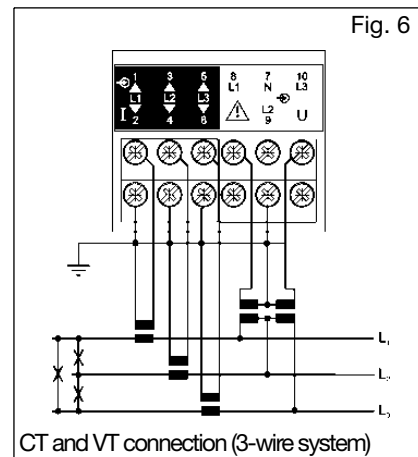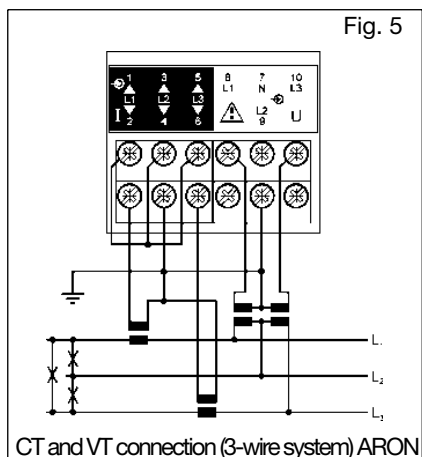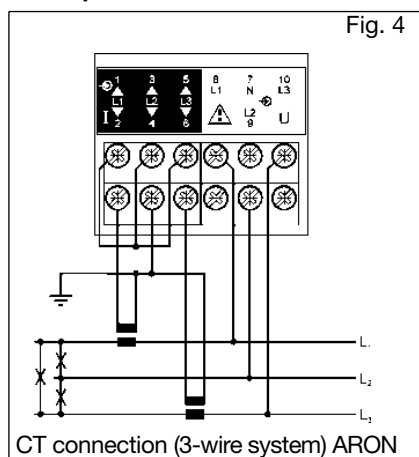


Wiring diagrams (optional modules)




1 analogue output (mA)




2 analogue outputs (mA)




1 relay outputs

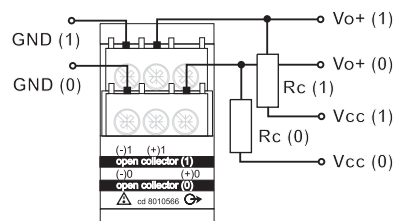


Open collector output connection. This wiring diagram is valid also for the open collector module with one output. The load resistances (RC) must be designed so that the close contact current is lower than 100mA; the VDC voltage must be lower than or equal to 30VDC.




1 analogue output (V)




2 analogue outputs (V)



2 relay outputs

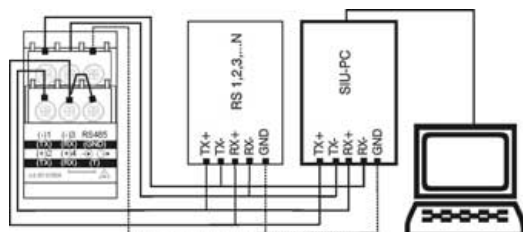


4-wire connection of RS485 serial port

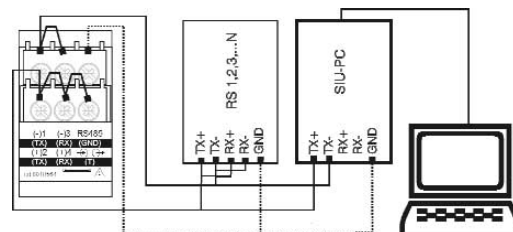



2-wire connection of RS485 serial port

Wiring diagrams: digital input modules

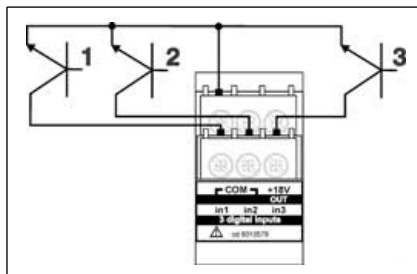


Connection by means of NPN transistors. Digital input module: AQ1042.

Connection by means of PNP transistors. Digital input module: AQ1042.

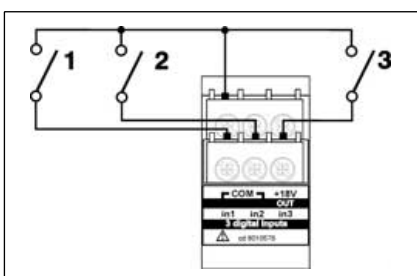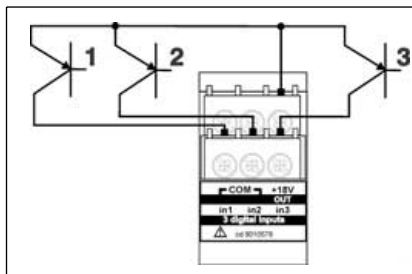


Connection by means of contacts. Digital input module: AQ1042.

Connection by means of contacts. Digital input module: AQ1038.

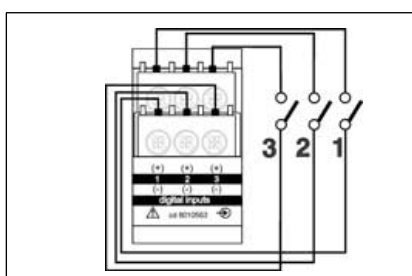

Front Panel Description

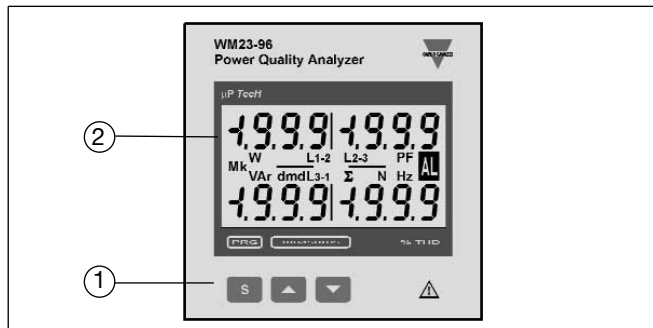

1. Key-pad

The programming of configuration parameters and the display are easily controlled by means of the 3 push buttons:

- "S" to enter into the programming phase and to confirm the password



- for value programming
- for function selections
- for page scrolling

2. Display

Instantaneous measurements:


- 4x3 1/2 digit (maximum read-out 1999)

Alphanumeric indications by means of LCD display for:


- Displaying the configuration parameters
- Displaying all the measured variables.

3. Programming lock

It's possible to lock the programming key-pad by means of a rotary switch located behind the instrument into the power supply slot. Turn counterclockwise the switch to lock the programming key-pad.




Dimensions

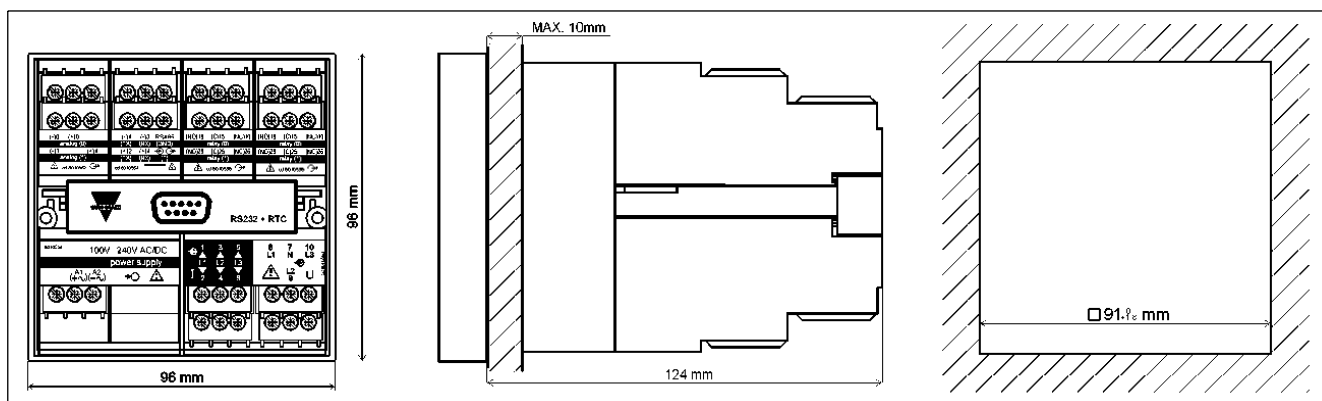


Terminal boards

Single analogue output modules




AO1050 (20mADC)
AO1051 (10VDC)
AO1052 (± 5 mADC)
AO1053 (± 10 mADC)
AO1054 (± 20 mADC)
AO1055 (± 1 VDC)
AO1056 (± 5 VDC)
AO1057 (± 10 VDC)

Dual analogue output modules




AO1026 (20mADC)
AO1027 (10VDC)
AO1028 (± 5 mADC)
AO1029 (± 10 mADC)
AO1030 (± 20 mADC)
AO1031 (± 1 VDC)
AO1032 (± 5 VDC)
AO1033 (± 10 VDC)


Digital output modules




AO1058
Single relay output



AO1035
Dual relay output




AO1059
Single open collector output




AO1036
Dual open collector output


Other input/output modules




AQ1038
3 digital inputs



AQ1042
3 digital inputs + aux




AR1034
RS422/485 communication port



AR1039
RS232 communication port

Power supply modules



AP1021 18-60 VAC/DC power supply
AP1020 90-260 VAC/DC power supply
AP1025 24VAC power supply
AP1024 48VAC power supply
AP1023 115VCA power supply
AP1022 230VCA power supply