

# Monitoring Relays

## 3-Phase Sequence and Phase Loss

### Type DPA53

CARLO GAVAZZI



- 3-phase monitoring relay for phase sequence and phase loss
- Detects when all phases are present and have the correct sequence
- Knob-adjustable undervoltage detection
- Measures own power supply
- Power supply range: 208 to 240 and 380 to 480 VAC ( $\pm 15\%$ )
- Output: 5 A SPDT relay normally energized
- For mounting on DIN-rail in accordance with DIN/EN 50 022
- 17.5 mm DIN-rail housing (DIN 43880)
- LED indication for relay and power supply ON

### Product Description

3-Phase relay for detection of incorrect phase sequence and phase loss.

Using the front knob it can be decided the undervoltage setpoint of the unit.

Supply range from 208 to 240 VAC and 380 to 480 VAC covered by two multivoltage relays. For mounting on DIN-rail. Housing 17.5 mm wide suitable both for back and front panel mounting.

### Ordering Key

**DPA 53 C M23**

Housing \_\_\_\_\_  
 Function \_\_\_\_\_  
 Type \_\_\_\_\_  
 Item number \_\_\_\_\_  
 Output \_\_\_\_\_  
 Power supply \_\_\_\_\_

### Type Selection

Mounting	Output	Supply: 208 to 240 VAC	Supply: 380 to 480 VAC
DIN-rail	SPDT	DPA 53 C M23	DPA 53 C M48

### Input Specifications

<b>Input</b> L1, L2, L3	Terminals L1, L2, L3 Measures on own supply
<b>Measuring range</b>	
M23	160 to 240 VAC
M48	320 to 480 VAC

### Supply Specifications

<b>Power supply</b> Rated operational voltage through terminals:	Overvoltage cat. II (IEC 60664, IEC 60038) L1, L2, L3 208 to 240 VAC $\pm 15\%$ , 45 to 65 Hz
M23	208 to 240 VAC $\pm 15\%$ , 45 to 65 Hz
M48	380 to 480 VAC $\pm 15\%$ , 45 to 65 Hz
<b>Rated operational power</b>	
M23	7 VA @ 230 VAC, 50 Hz
M48	13 VA @ 400 VAC, 50 Hz
	Supplied by L1 and L3

### Output Specifications

<b>Output</b>	SPDT relay, N.E.
<b>Rated insulation voltage</b>	250 VAC
<b>Contact ratings</b> (AgSnO <sub>2</sub> )	$\mu$
Resistive loads	AC 1 5 A @ 250 VAC
DC 12	5 A @ 24 VDC
Small inductive loads	AC 15 2.5 A @ 250 VAC
DC 13	2.5 A @ 24 VDC
<b>Mechanical life</b>	$\geq 30 \times 10^6$ operations
<b>Electrical life</b>	$\geq 10^5$ operations (at 8 A, 250 V, $\cos \varphi = 1$ )
<b>Operating frequency</b>	$\leq 7200$ operations/h
<b>Dielectric strength</b>	
Dielectric voltage	$\geq 2$ kVAC (rms)
Rated impulse withstand volt.	4 kV (1.2/50 $\mu$ s)

### General Specifications

<b>Reaction time</b>	
Alarm ON delay	< 100 ms
Alarm OFF delay	< 300 ms
<b>Accuracy</b>	
Temperature drift	(15 min warm-up time) $\pm 1000$ ppm/ $^{\circ}$ C
Repeatability	$\pm 0.5\%$ on full scale
<b>Indication for</b>	
Power supply ON	LED, green
Relay ON	LED, yellow



General Specifications (cont.)

<b>Environment</b>	
Degree of protection	IP 20
Pollution degree	2
Operating temperature	
@ Max. voltage, 50 Hz	-20 to +60°C, R.H. < 95%
@ Max. voltage, 60 Hz	-20 to +50°C, R.H. < 95%
Storage temperature	-30 to +80°C, R.H. < 95%
<b>Housing dimensions</b>	17.5 x 81.5 x 67 mm
<b>Weight</b>	Approx. 75 g
<b>Screw terminals</b>	
Tightening torque	Max. 0.5 Nm acc. to IEC 60947
<b>Approvals</b>	UL, CSA
<b>CE Marking</b>	Yes
<b>EMC</b>	
Immunity	Electromagnetic Compatibility
Emission	According to EN 61000-6-2 According to EN 50081-1

Level setting

Select the proper undervoltage level using the knob according to the phase-phase voltage and the needed sensitivity.

**Centre knob:**  
Setting of under level on absolute scale.



Mode of Operation

DPA53 monitors its own 3- phase power supply. The relay operates when all the phases are present, the phase sequence is correct and each phase-phase voltage is above the adjusted setpoint. The relay releases when one phase-phase voltage drops below the setpoint or when the phase sequence is incorrect.


**Example 1**  
The relay monitors that the power supply has the correct phase sequence and that all phases are present.

**Example 2**  
The relay releases in case of interruption of one or more phases, provided that the regenerated voltage does not exceed the set voltage.

Wiring Diagrams

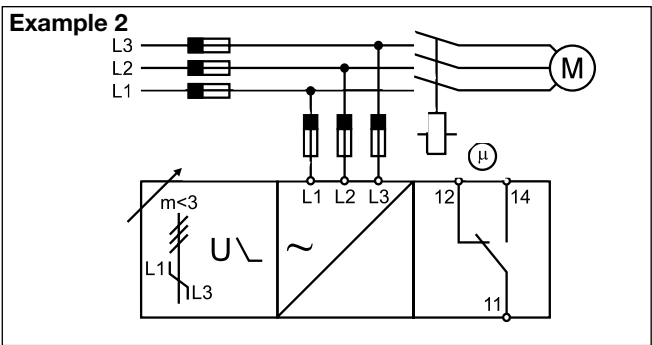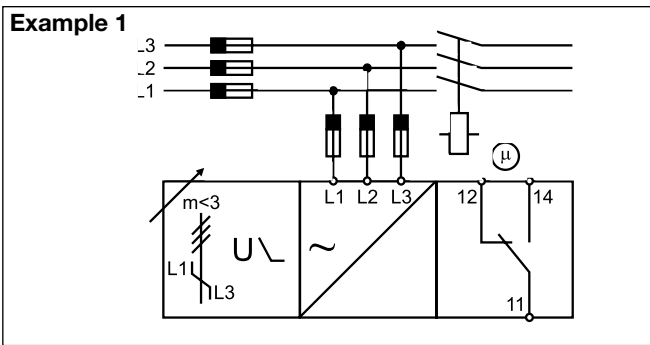

Operation Diagrams

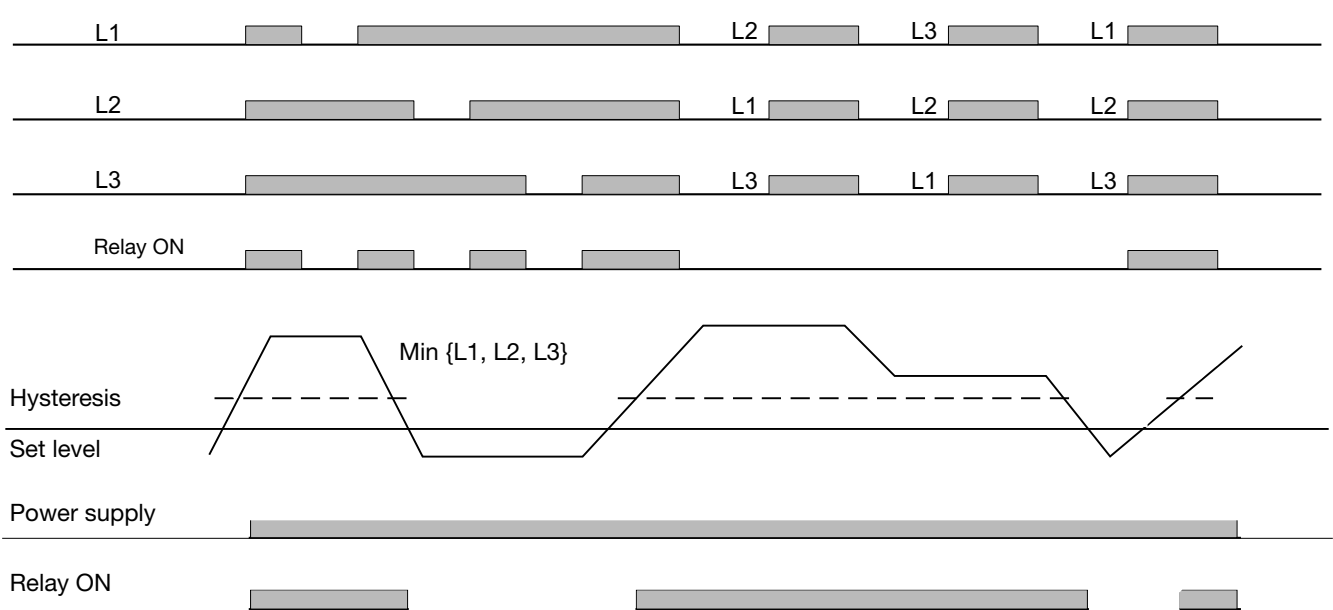

## Dimensions

