


# Midi Industrial Relay Type RMI. 2-10 10A Monostable

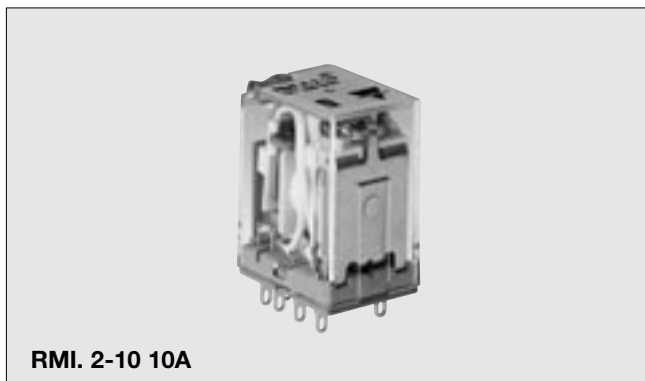

- High switching power
- Small size
- Wide range of application
- 12 A switching capacity
- 2 poles configuration
- AC coils 6 to 230 VAC
- DC coils 5 to 110 VDC
- 1.5 KV dielectric coil to contacts
- Au-clad contact available
- Conform to the CE low voltage directive
- UL, VDE, CSA approved
- Standard with LED, Push with arm and Flag

## Product Application

- Lift-Elevators
- Moving Stairs
- Textile machines
- Wood working machines
- Plastic molding machines
- Ceramic working machines

## Ordering Key

**RMI A 2-10 012 DC**

Type \_\_\_\_\_  
Terminal version \_\_\_\_\_  
Contact code \_\_\_\_\_  
Rated coil voltage \_\_\_\_\_  
DC / AC \_\_\_\_\_

Terminal version: A = Soldering terminals  
B = PCB terminals

## Type Selection

Contact configuration	Contact rating	Contact code
2 change over contacts (DPDT {2-form C})	10 A	2-10

## Coil Characteristics, DC (20°C)

Nominal voltage VDC	Pick-up voltage VDC	Drop-out voltage VDC	Coil resistance $\Omega$
5	4.0	0.5	27.5 $\pm$ 10%
6	4.8	0.6	40.0 $\pm$ 10%
12	9.6	1.2	160.0 $\pm$ 10%
24	19.2	2.4	650.0 $\pm$ 10%
48	38.4	4.8	2600.0 $\pm$ 15%
110	88.0	11.0	11000.0 $\pm$ 15%

## Coil Characteristics, AC (20°C)

Nominal voltage VAC	Pick-up voltage VAC	Drop-out voltage VAC	Coil resistance $\Omega$
6	4.8	1.8	11.5 $\pm$ 10%
12	9.6	3.6	46.0 $\pm$ 10%
24	19.2	7.2	184.0 $\pm$ 10%
48	38.4	14.4	735.0 $\pm$ 10%
115/120	96.0	36.0	4550.0 $\pm$ 15%
230	176.0	66.0	14400.0 $\pm$ 15%

## Contact Characteristics

<b>Contact rating</b> (with resistive load)	<b>10 A - 250 VAC</b>	<b>Initial contact resistance</b>	<b>50 m<math>\Omega</math> (at 1 A 6 VDC)</b>
<b>Usually rating</b>	<b>10 A - 250 VAC / 30 VDC</b>	<b>Voltage</b>	
<b>Max. rating</b>	<b>12 A - 250 VAC / 30 VDC</b>	Max. switching voltage	<b>250 VAC / 30 VDC</b>
<b>Material</b>	<b>Silver alloy</b>	Max. switching power	<b>300 W - 2500 VA</b>
<b>Current</b>		<b>Life</b>	
Max. switching current	<b>10 A</b>	Electrical life	<b>1x10<sup>5</sup> ops (1800 ops/h)</b>
		Mechanical life	<b>1x10<sup>7</sup> ops (18000 ops/h)</b>


## Insulation

<b>Test Voltage</b> (1 min.) Between coil and contacts Between open contacts	<b>1000 VAC</b> <b>1000 VAC</b>	<b>Between contacts sets</b> <b>Initial insulation resistance</b>	<b>1500 VAC</b> <b>1.000 MΩ - 500 VAC</b>
--	------------------------------------	--	--


## General Data

<b>Nominal coil power</b>	<b>0.9 W DC / 1.2 VA AC</b>	<b>Shock resistance</b>	
<b>Operating time</b> (At nominal voltage)	<b>25 ms</b>	Funkcional	<b>100 m/s<sup>2</sup></b>
<b>Release time</b> (At nominal voltage)	<b>25 ms</b>	Destructive	<b>1000 m/s<sup>2</sup></b>
<b>Ambient temperature</b>	<b>-55° C to +70° C</b>	<b>Humidity</b>	<b>35% to 95%</b>
<b>Vibration resistance</b>	<b>10 to 55 Hz 1.5 mm</b>	<b>Termination</b>	<b>PCB and AMP</b>
		<b>Construction</b>	<b>Dust cover</b>
		<b>Weight</b>	<b>~ 37 g</b>


## Dimensions

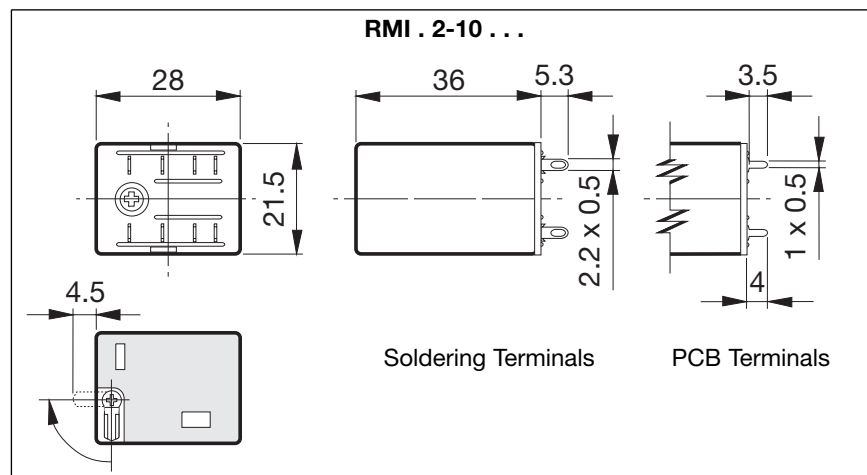

## Pin View

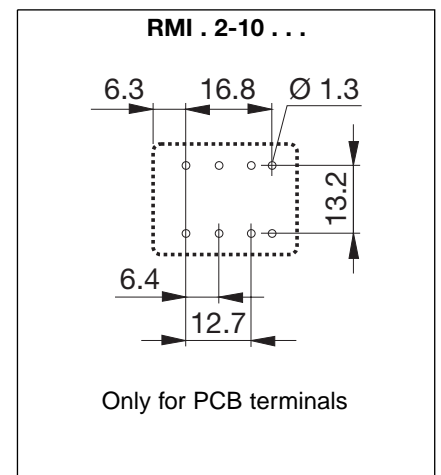


## Wiring Diagram

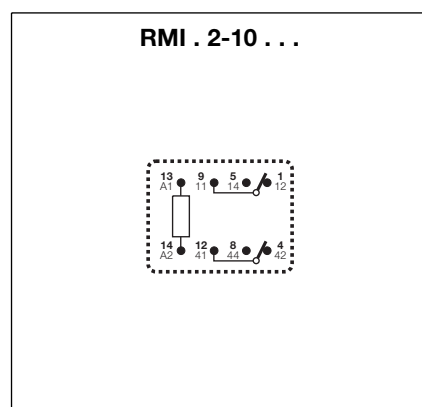


## Diagrams

**1 Electrical life reduction factor at AC inductive load**

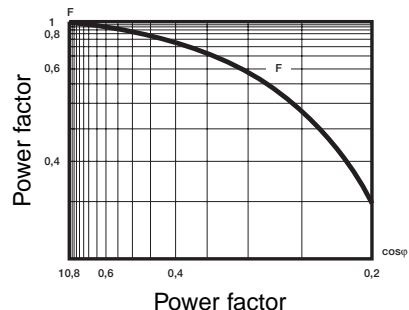

**2 Maximum DC resistive load breaking capacity**

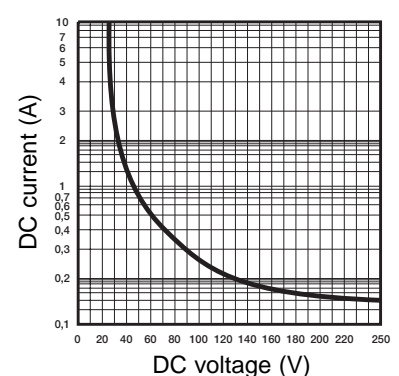

## Approvals



The approvals stated are not generally applicable to all the relay versions.

For further information please apply for relevant data sheets ref. **3.84.00.10.x**