


Magnetic Slot Sensors ISY Series

CARLO GAVAZZI

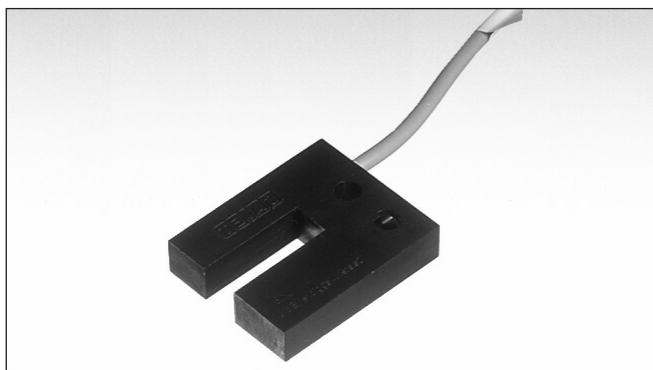

- Slot case
- Plastic body
- NC or Change-over output function
- Min. air gap from ferromagnetic parts 10 mm

Product Description

In ISY type sensors the minimum air gap from ferromagnetic parts is 10 mm; the minimum distance between the fixing holes of two contiguous

switches is 10 cm. The optimum dimensions concerning soft iron actuators is 20 x 50 x 1 for ISY models.

Ordering Key

ISY.C.3

Type

Output Function

Reed Contact Type

Type Selection

Output connection	Reference
NC	ISY.C.3
Change-over	ISY.S.1

General specification


Case	Plastic
Protection degree	IP67
Operating temperature	-25 to +75 °C
Output connection	PVC Cable

Electrical specifications

Contacts	3	S.1
Max switching voltage	500 Vac	100 Vac
Max switching current	0,5 A	0,25 A
Max switching power	10 VA	5 VA



Dimensions

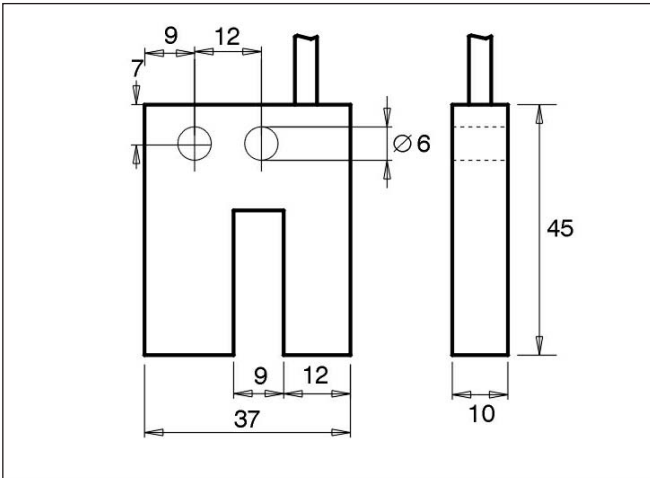

Wiring Diagrams

