

# Solid State Relays Industrial, 1-Phase DCS Types RD 0605 -D, RD 2001 -D, RD 3501 -D

CARLO GAVAZZI




- DC Solid State Relay
- Rated operational current: 1 and 5 ADC
- Operational voltage range: Up to 350 VDC
- Input range: 3 to 32 VDC
- Insulation: OPTO (input-output) 4000 VACrms

## Product Description

The DC switching relay is used in applications in which there is a need for fast switching of small DC loads with a high input/output insulation of more

than 4000 VACrms. The DC switching transistor relay always switches ON and OFF in accordance with the applied control voltage.

## Ordering Key **RD 06 05 -D**

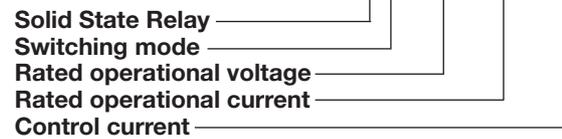

## Type Selection

Switching mode	Rated operational voltage	Rated operational current	Control voltage
D: DC switching	06: 60 VDC 20: 200 VDC 35: 350 VDC	01: 1 ADC 05: 5 ADC	-D: 3 to 32 VDC

## Selection Guide

Rated operational voltage	Control voltage	Rated operational current 1 ADC	5 ADC
60 VDC	3 to 32 VDC		<b>RD 0605 -D</b>
200 VDC	3 to 32 VDC	<b>RD 2001 -D</b>	
350 VDC	3 to 32 VDC	<b>RD 3501 -D</b>	

## General Specifications

	RD 0605 -D	RD 2001 -D	RD 3501 -D
Operational voltage range	3 to 60 VDC	3 to 200 VDC	3 to 350 VDC
Off-state blocking voltage	≥ 60 VDC	≥ 200 VDC	≥ 350 VDC
Approval	CSA	CSA	CSA

## Input Specifications

	RD 2001 -D RD 3501 -D	RD 0605 -D
Control voltage range	3 to 32 VDC	3 to 32 VDC
Pick-up voltage	≤ 3 VDC	≤ 3 VDC
Drop-out voltage	≥ 1 VDC	≥ 1 VDC
Reverse voltage	≤ 32 VDC	≤ 32 VDC
Activating frequency	≤ 100 Hz	≤ 100 Hz
Input impedance	1 kΩ	1 kΩ
Response time pick-up @ V <sub>in</sub> ≥ 5 V	≤ 100 μs	≤ 100 μs
Response time drop-out	≤ 1 ms	≤ 1 ms
Input pulse rise and fall time	≤ 100 μs	no limit

## Output Specifications

	RD 2001 -D RD 3501 -D	RD 0605 -D
Rated operational current DC 1	1 A	5 A
Minimum operational current	1 mA	1 mA
Rep. overload current t=1 s	≤ 2 A	≤ 10 A (15A@80ms)
Off-state leakage current @ rated voltage	≤ 1 mA	≤ 1 mA
On-state voltage drop @ rated current	≤ 1.5 V	≤ 1.5 V

## Thermal Specifications


Operating temperature	-40 to +100°C (-40 to 212°F)
Storage temperature	-40 to +100°C (-40 to 212°F)
Junction temperature	≤ 150°C (302° F)
R <sub>th</sub> junction-case	≤ 3 K/W
R <sub>th</sub> junction to ambient	≤ 15 K/W

## Insulation


Rated insulation voltage Input to output	≥ 4000 VACrms
Rated insulation voltage Output to case	≥ 4000 VACrms
Insulation resistance Input to output	≥ 10 <sup>10</sup> Ω
Insulation resistance Output to case	≥ 10 <sup>10</sup> Ω
Insulation capacitance Input to output	≤ 8 pF
Insulation capacitance Output to case	≤ 50 pF

## Wiring Diagrams

RD 2001-D RD 3501-D

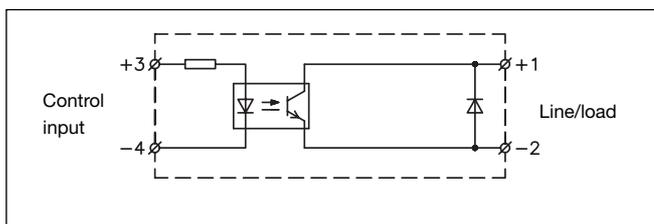


RD 0605 -D

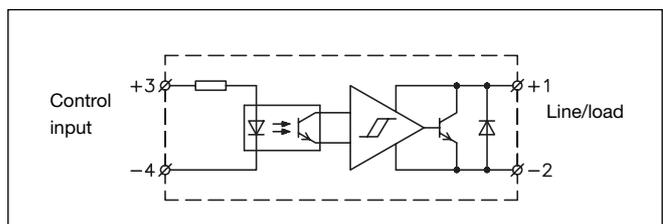




## Functional Diagrams

RD 0605-D

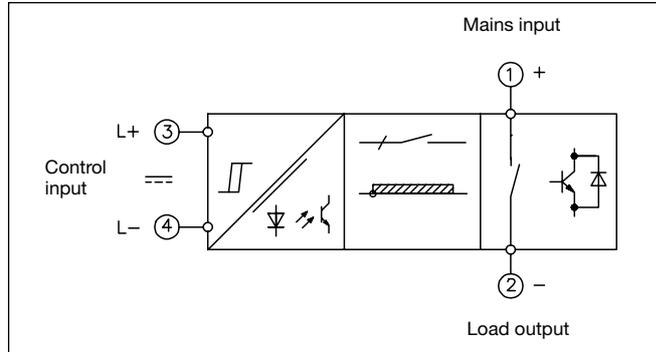


RD 2001-D RD 3501-D

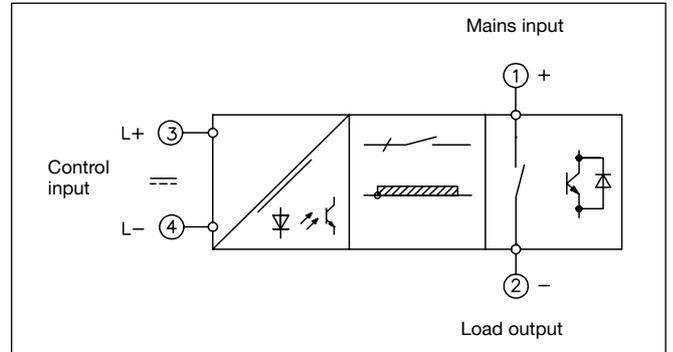


## Applications


### High-power switching

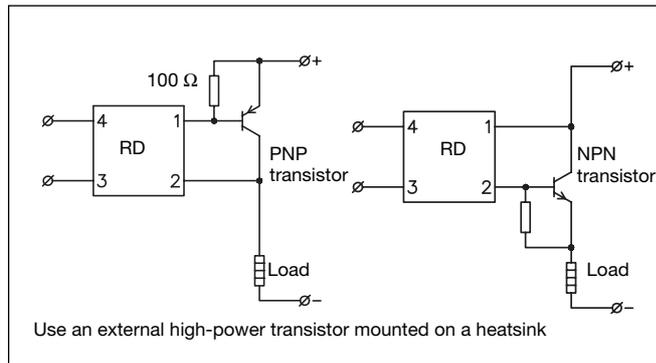

### Inductive load

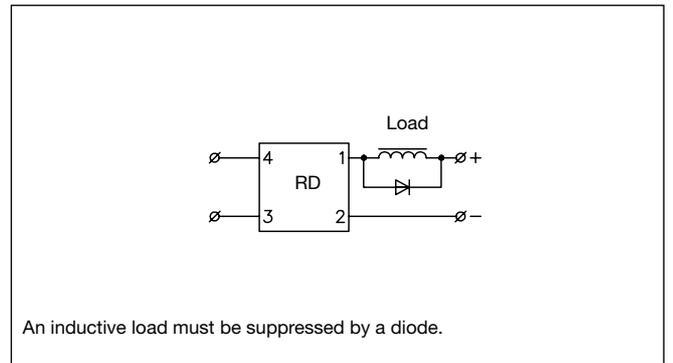

### Fusing

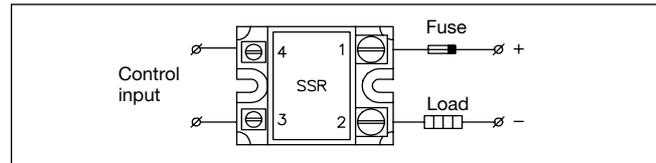

## Heatsink Dimensions

RD 0605 -D

	Load current [A DC]						Thermal resistance [K/W]					
	5	4	3	2	1	0	20	30	40	50	60	70
5	10.7	9.3	8	6.7	5.3	4						
4	13.3	11.7	10	8.3	6.7	5						
3	-	-	13.3	11.1	8.8	6.7						
2	-	-	-	-	13.3	10						
1	-	-	-	-	-	-						

Ambient temp. [°C]  $T_A$


## Heatsink Selection

Carlo Gavazzi Heatsink (see Accessories)	Thermal resistance
No heatsink required RHS 100 Assy	$R_{th\ s-a} > 12.5\ K/W$ 3.0 K/W

Compare the value found in the current versus temperature chart with the standard heatsink values and select the heatsink with the next lower value.

Frequency = 0 to 10 Hz.  
Types RD 2001-D and RD 3501-D require no heatsinking.

## Dimensions

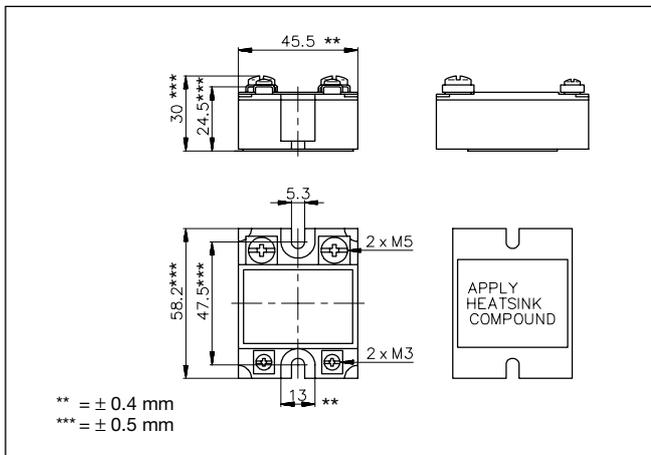

## Accessories

Protection cover  
Heatsinks  
DIN rail adapter  
Varistors  
Fuses

For further information refer to "General Accessories".

## Housing Specifications

Weight	Approx. 110 g
Housing material	Noryl GFN 1, black
Base plate	Aluminium
Potting compound	Polyurethane
Relay	
Mounting screws	M5
Mounting torque	≤ 1.5 Nm
Control terminal	
Mounting screws	M3 x 6
Mounting torque	≤ 0.5 Nm
Power terminal	
Mounting screws	M5 x 6
Mounting torque	≤ 2.4 Nm