


CARLO GAVAZZI
Automation Components

Relays

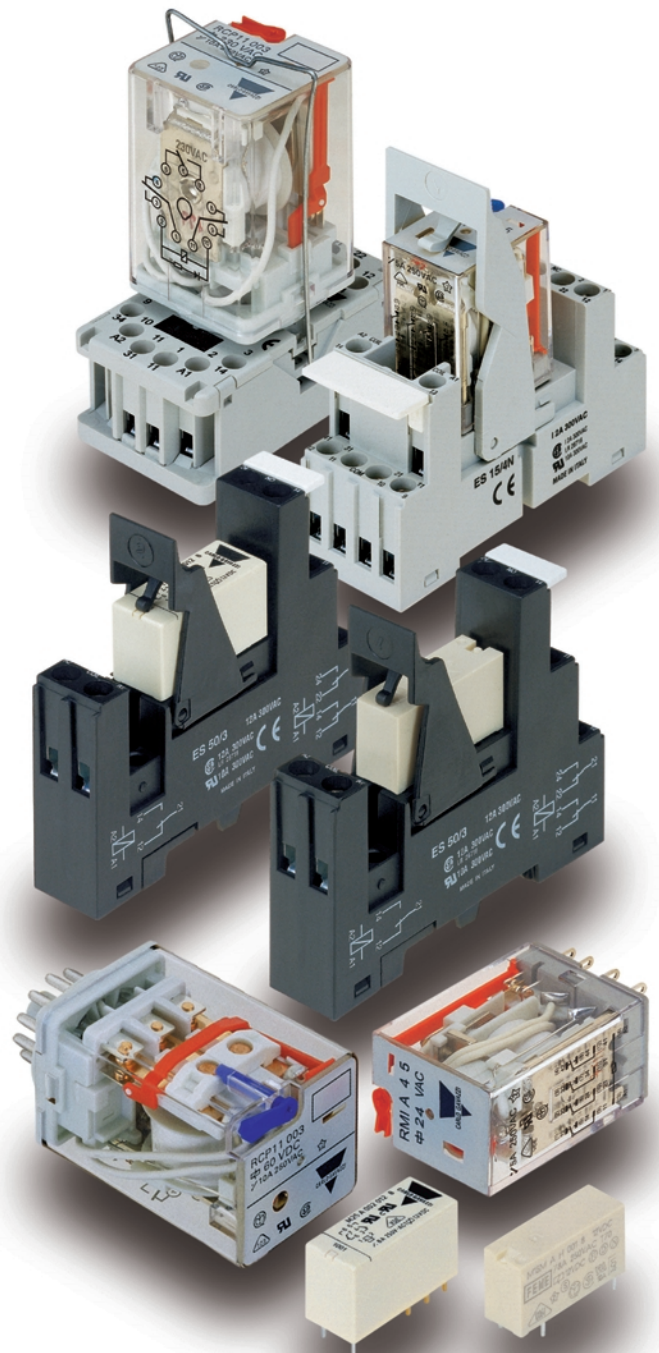



Switch

Monostable or Bistable Miniature Power Relays

CARLO GAVAZZI



- Miniature size 15 mm high
- PCB mounting
- Monostable or bistable versions
- 4 kV / 8 mm insulation
- Switching capacity 8 A / 250 VAC
- DC coils:
 - 2 to 147 VDC monostable version
 - 2.4 to 84.7 VDC bistable version
- 1 normally open contact or
1 change over contact
- General purpose, industrial electronics
- Sealed according to IP 67 standard
- 4 different pin layout configuration
- Low coil power consumption

Type **M15**

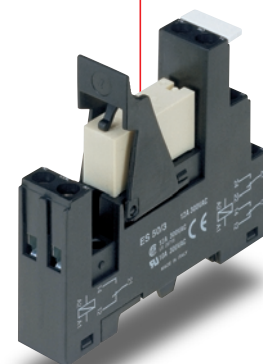

- Miniature size 15.7 mm high
- PCB mounting
- Monostable version
- 5 kV / 10 mm insulation
- Switching capacity:
 - 12 or 16 A / 250 VAC 1 pole version
 - 8 A / 250 VAC 2 pole version
- DC coils 5 to 110 VDC
- 1 or 2 change over contacts
- General purpose, industrial electronics
- Sealed according to IP 67 standard
- Low coil power consumption


Type **M25**

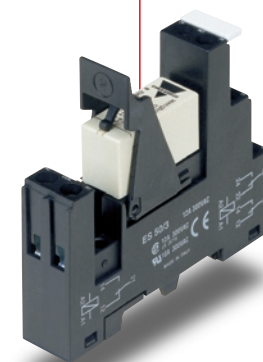


To instantly view a data sheet and specify products, visit www.GavazziOnline.com

Gross Automation (877) 268-3700 · www.carlogavazzisales.com · sales@grossautomation.com

Relay



TYPE		M15 - M15 R1/R2	M25	RMI 2-10 / RMI 4-5	RCP
DIMENSIONS					
Height - Length - Width		15 x 29 x 10	15.7 x 29 x 12.7	36 x 28 x 21.5	56 x 35.5 x 35.5
CONTACTS					
Configuration		1 CO, 1 NA	1 CO, 2 CO	2 CO, 4 CO	2 CO, 3 CO
Material		AgCdO	AgCdO	Silver alloy	Silver alloy
Rated current		8 A	8 A, 12 A, 16 A	5 A, 10 A	10 A
Max. switching power		2000 VA	2000VA-3000VA-4000VA	300 W-2500 VA (2 poles) 150 W-1250 VA (4 poles)	300 W- 2500 VA
Max. contact voltage		380 VAC	440 VAC	250 VAC / 30 VDC	380 VAC
Minimum permissible load (Typical value)		100 mA at 24 VDC 10 mA at 10 mVDC (Au)	100 mA at 24 VDC	-	100 mA at 24 VDC
COIL					
Rated voltage	DC	3 to 110 VDC 3 to 48 VDC (M15 R1) 3 to 24 VDC (M15 R2)	5 to 110 VDC	5 to 110 VDC	6 to 110 VDC
	AC	-	-	6 to 230 VAC	6 to 230 VDC
Consumption	DC	100 mW V_{min}	0.4 W	0.9 W	1.3 W
	AC	-	-	1.9 VA	2.1 VA
Operating range		0.7 to 1.7 V_n	See data sheet	0.7 to 1.7 V_n	-
GENERAL DATA					
Electrical life (at max. switching power)		1 x 10 ⁵ cycles	1 x 10 ⁵ cycles	1 x 10 ⁵ ops (1800 ops/h)	1 x 10 ⁵
Mechanical life		30 x 10 ⁶ cycles	1 x 10 ⁷ cycles	1 x 10 ⁷ ops (18000 ops/h)	1 x 10 ⁷
Insulation test VAC (1min)					
- Contact/coil		4000 VAC	5000 VAC	3750 VAC V_{rms}	3750 VAC V_{rms}
- Open contacts		1000 VAC	1000 VAC	750 VAC V_{rms}	750 VAC V_{rms}
- Contact different polarity		-	2500 VAC (1 pole)	1250 VAC V_{rms}	1250 VAC V_{rms}
Protection category			IP 67	IP 67	IP 40 IP 40
Operating temperature		-40°C to +70°C	-40°C to +85°C	-55°C to +70°C	-40°C to +55°C
Terminal shape		PCB	PCB	Plug-in and PCB	Plug-in
Approvals		UL, CSA, VDE, IMQ S, N, D, F	VDE	UL, CSA, VDE, IMQ	UL, CSA, VDE, IMQ
OPTIONS					
		AgNi, AgSnO ₂ Gold plated contacts	AgNi, AgSnO ₂ Gold plated contacts	-	-
SOCKETS					
		LED Indication	Diode Protection	RC Network Protection	MOV Protection



CARLO GAVAZZI offers a wide range of **printed circuit board and modular DIN rail mount sockets** for our various electromechanical relays. The following optional plug-in blocks are also offered for the DIN rail mount sockets:

Ordering Key				Pin Layout Configuration	Contact Material	Version	Contact Code	Contact Rated Current	Coil Rated Voltage
M 15				M	A	H	001	8	12VDC
M = 3.5 mm E = 3.2 mm B = 5 mm F = 2.5 mm				A = AgCdO B = AgNi C = AgCdO, Au plated > 3.5 micron D = AgCdO, Au gilded > 0.5 micron E = AgNi, Au plated > 3.5 micron F = AgNi, Au gilded > 0.5 micron S = AgSnO₂		H = Sealed	001 = 1 Change-over 100 = 1 Make contact	8 = 8A	3V - 5V - 6V - 8V - 12V - 24V - 48V - 110V DC

Ordering Key				Contact Material	Rated Coil Voltage	DC/AC	Options
M 25				A	001	024	16
A = AgCdO (Standard) S = AgSnO ₂ C = AgNi10, Au plated > 3.5 micron G = AgNi10				001 = 1 Change-over contact 100 = 1 Make contact 002 = 2 Change-over contacts 200 = 2 Make contacts		5VDC=005 / 6VDC=006 / 12VDC=012 24VDC=024 / 48VDC=048 / 60VDC=060 110VDC=110 16 = 16A (001 - 100) Pin layout 5 mm 12 = 12A (001 - 100) Pin layout 3.5 mm 8 = 8A (002 - 200) Pin layout 5 mm	

Ordering Key				Terminal Version	Contact Code	Rated Coil Voltage	DC/AC
RMI				A	4 5	230	AC
A = Soldering Terminals B = PCB Terminals				2 10 = 2 Change-Over contacts 10A 4 5 = 4 Change-Over contacts 5A		5V-6V-12V-24V-48V-60V-110V DC 6V-12V-24V-48V-115/120V-230V AC DC = Direct Current Coils AC = Alternate Current Coils	



Ordering Key				Number of Pins	Contact Code	Rated Coil Voltage	DC/AC
RCP				11	003	230	AC
8 = Eight Pins 11 = Eleven Pins				002 = 2 Change-Over Contacts 10A 003 = 3 Change-Over Contacts 10A		6V-12V-24V-48V-60V-100V-110V DC 6V-12V-24V-48V-115/120V-230V AC DC = Direct Current Coils AC = Alternate Current Coils	

Monostable Midi Industrial and Industrial Relays



- High switching power
- Small size
- Monostable version
- Switching capacity 2 poles version
10 A / 250 VAC - 12 A (5x10⁴ cycles)
- Switching capacity 4 poles version
5 A / 250 VAC - 6 A (5x10⁴ cycles)
- DC coils 5 to 110 VDC
- AC coils 6 to 230 VAC
- 2 or 4 change over contacts
- Standard with LED, locking push to test button and mechanical flag indicator
- 3,750 VAC dielectric coil to contacts
- Sealed according to IP 40 standard
- Conform to the CE low voltage directive

Type **RMI**

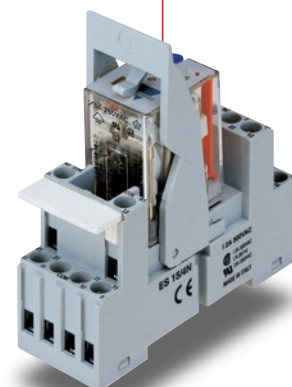

- 8 or 11 pin socket mounting
- Monostable version
- Long life (minimum 100,000 electrical operations at 10 A 250 VAC / 30 VDC)
- Switching capacity:
10 A / 250 VAC - 12 A (5x10⁴ cycles)
- DC coils 6 to 110 VDC
- AC coils 6 to 230 VAC
- 2 or 3 change over contacts
- Matched sockets available
- Standard with LED, locking push to test button and mechanical flag indicator
- 3,750 VAC dielectric coil to contacts
- Sealed according to IP 40 standard
- Conform to the CE low voltage directive

Type **RCP**

