

# Solid State Relays Industrial, 1-Phase Hybrid Type RMD



- Hybrid relay: Solid State Relay / Electromechanical Relay
- Operational ratings up to 230V, 20A ACrms
- Integral bypassing of semiconductors
- Internal over-temperature protection
- Compact 17.5mm wide housing
- Standard modular design
- DIN rail mounting
- No need for external heatsink
- Minimum audible noise
- Fit and forget: millions of switching cycles
- Ideal for switching of single phase loads in residential buildings

## Product Description

The RMD houses semiconductor thyristors and mechanical contacts that compliment each other. On applying the control voltage, thyristors are activated. After a short delay, an electromechanical relay is activated. This switching method protects the contacts of the electromechanical relay and reduces heating of the thyristors. The same principle applies during removal of the control input. The result is millions of trouble-free cycles in a compact and modular switching package.

## Ordering Key

**RMD 1 H 23 D 20**

Hybrid Relay  
Number of Poles  
Switching mode  
Rated operational voltage  
Control voltage  
Rated operational current

## Type Selection

Switching mode	Rated operational voltage	Rated operational current	Control voltage
H: Hybrid Switching	23:230 VAC $\pm$ 15%	20: 20AACrms	D: 4-32 VDC A: 24-275VAC/ 24-190VDC

## Selection Guide

Rated operational voltage	Non-rep. voltage	Control voltage	Rated operational current 20 AACrms
230 VAC $\pm$ 15%	600 V <sub>p</sub>	4-32 VDC 24-275 VAC 24-190 VDC	RMD1H23D20 RMD1H23A20

## General Specifications

Operational voltage range	90-260VACrms	Pollution degree	2
Non-rep. peak voltage	600V <sub>p</sub>	Degree of protection	IP20 (IEC 60529)
Zero voltage turn-on	<15V	Numbers of cycles	> 5,000,000
Operational frequency range	45-65Hz	Audible noise	< 40dB at 1m
Power factor	$\geq$ 0.9 @ 230VACrms	Control status indication	LED, Green
Approvals	UL, cUL	Dielectric withstand voltage input to output	2.5kVACrms
Markings	CE		
Emission			
RMD1H23D20	EN55011/CISPR11 Class A		
RMD1H23A20	EN55011/CISPR11 Class B		


## Output Specifications

Rated operational current AC1/AC51/AC7a @ 25°C	20AACrms,(16AACrms UL rating)	Power dissipation at rated operational current	6.4W
@ 40°C	16AACrms	Number of commutations per minute @ 25°C	6
@ 55°C	11.5AACrms	Minimum load current	100mA
Assigned load rating (resistive)	4.5kW @ 25°C	Max. leakage current	3mA
Rep. overload current t=1s	37AACrms	Relay contacts	Normally open AgCdO
Non-rep. surge current, t=10ms	200A <sub>p</sub>	Recommended fusing (not supplied)	660 gRB 10-20 Fuse type ST10
I <sup>2</sup> t for fusing, 1ms<t<10ms	200A <sup>2</sup> s		
Critical di/dt, non repetitive	100A/μs		
Critical dV/dt off state min.	500 V/μs		


## Input Specifications

	RMD1H23D20	RMD1H23A20
Control voltage	4-32VDC	24-275VAC/ 24-190VDC
Pick-up voltage	2VDC	9VAC
Drop-out voltage	1VDC	5VAC
Reverse voltage	32VDC	-
Max. input current	5mADC	2.5mAAC
Response time pick-up	≤ 40ms	40ms
Response time drop-out	≤ 70ms	≤ 100ms

## Connection Diagram

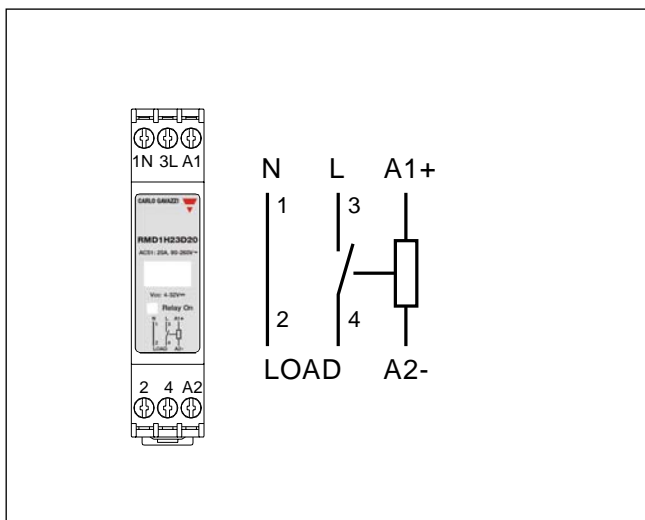

## Dimensions

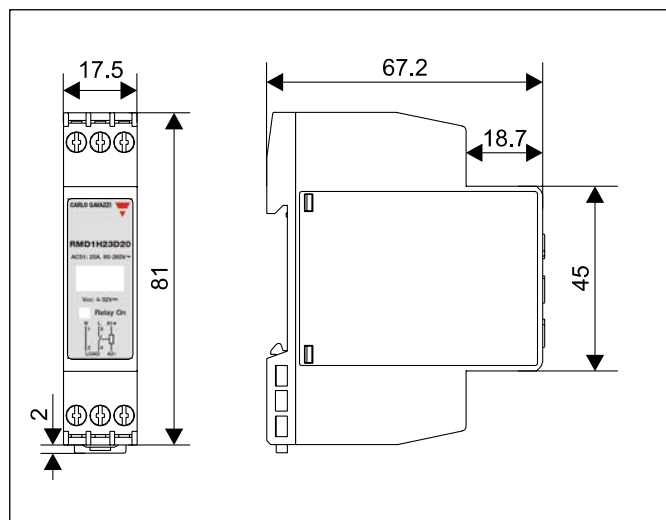

All dimensions in mm

## Housing Specifications

Weight	60g (approx)
Housing material	self extinguishing UL94V0
Potting compound	none
Terminals	
Tightening screws	M3

Max. terminal tightening torque	0.6Nm (5.3 lb.in)
Max. cross-sectional area of cable (stranded)	4.0mm <sup>2</sup> (AWG 12) 2.5mm <sup>2</sup> (AWG12) accord. to IEC 60947-1

## Thermal Specifications

Operating temperature	-5 to +55°C
Storage temperature	-40° to +85°C
Relative humidity	< 95% non-condensing

## Over Temperature Protection

Over-temperature indication	LED intermittent
Reset	Switch OFF supply and switch back ON in > 100ms
Temperature limit	100°C

## Derating vs. mounting space

